



















Flooring Type Tipo de pavimento Belagsart		EN 13845/ EN 13553	Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag		
Classification for use Areas de uso Einsatzbereiche		EN 685	34 & 43 34 y 43 34 & 43		
Slip Resistance Resistencia al deslizamiento Rutschsicherheit*		TRRL EN 13845 EN 13893 DIN 51130	> 36 ESf DS R10		
Thickness Espesor Total Gesamtdicke		EN 428	2.0 mm		
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme bestanden		
Wear Layer Capa de uso Nutzschicht			2 mm		
Weight Peso Flaechengewicht		EN 430	2.4 kg/m ²		
Roll Dimensions Dimensiones del rollos Rollenabmessungen		EN 426	2 m x 20 m = 40 m ²		
Light Fastness Resistencia a la luz Lichtechtheit		EN 20105-B02	>6		
Sound Insulation Aislamiento acústico Trittschal		ISO 140-8	5 dB		
Wear Resistance Abrasión Verschleißverhalten		EN 13845 EN 660-2	Group T / Grupo T / Gruppe T		
Indentation Punzonamiento Resteindruck		EN 433	< 0,10mm		
Fire Performance Reacción al fuego Brandverhalten		EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl s1 >8kW/m ² Pass Clase Bfl s1 >8kW/m ² Conforme Klasse Bfl-s1 >8kW/m ² , bestanden		
Chemical Resistance Resistencia a los productos químicos Chemikalieneinwirkung**		EN 423	Good Buena beständig		
Castor Chair Abrasion Huellas de sillas de ruedas Stuhlrollenbeanspruchung		EN 425	Pass Conforme geeignet		
Under floor heating Calefacción por el suelo Fußbodenheizung		EN 12667	Suitable Apto geeignet		
Electrical Behaviours Características eléctricas Elektrisches Verhalten		EN1815	EN 1081	< 2 kV Antistatic < 2 kV Antiestáticas < 2 kV antistatisch	≤10 ⁹ Ω (VM20SD)
VOC Emissions Emisiones de VOC VOC Emissionen		prEN 15052 Section 01350 AgBB/DiBt	Low/Pass/Approved Baja/Conforme/Aprobado gering/geeignet/zugelassen		

*For wet areas where bare foot slip resistance is required such as showers and swimming pool surrounds, we recommend the use of Altro Marine™ 20 / T20.

** Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance.

Contains Biocide.


Installation and Maintenance

All Installations in accordance with Altro safety flooring Instructions and Local Codes of Practice.

Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro

flooring in accordance with Installation Instructions can affect its performance and slip resistance.

Floors should be protected from other trades and thoroughly cleaned before handover.

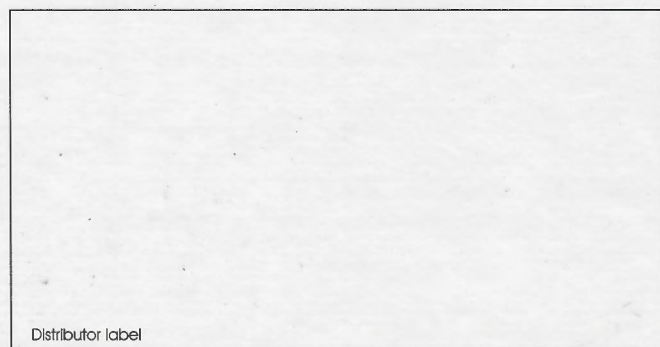

Distributor label

For further technical information please visit www.altro.com

Si desea obtener más información técnica, visite www.altroscandess.com

Weitere technische Informationen finden Sie auf unserer Website www.altro.de

