



Flooring Type Tipo de pavimento Belagsart		EN 13845/ EN 13553	Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag
Classification for use Areas de uso Einsatzbereiche		EN 685	34 & 43 34 y 43 34 & 43
Slip Resistance Resistencia al deslizamiento Rutschsicherheit*		TRRL EN 13845 EN 13893 DIN 51130	> 36 ESf DS R10
Thickness Espesor Total Gesamtdicke		EN 428	2.2 mm
Wear Layer Capa de uso Nutzschicht		EN 429	0.8mm
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme bestanden
Weight Peso Flächengewicht		EN 430	2.6 kg/m ²
Roll Dimensions Dimensiones del rollos Rollenabmessungen		EN 426	2.0m x 20.00m - 40m ²
Light Fastness Resistencia a la luz Lichtechtheit		EN 20105-B02	>6
Sound Insulation Aislamiento acústico Trittschal		ISO 140-8	7 dB
Wear Resistance Abrasión Verschleißverhalten		EN 13845	<10% particles lost over 50000 Cycles <10% de las partículas perdidas en 50.000 ciclos <10% Partikel werden über 50000 Umdrehungen verloren
Indentation Punzonamiento Resteindruck		EN 433	< 0.10mm
Fire Performance Reacción al fuego Brandverhalten		EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl-s1 > 8kW/m ² Pass Clase Bfl-s1 > 8kW/m ² Conforme Klasse Bfl-s1 > 8kW/m ² , bestanden
Chemical Resistance Resistencia a los productos químicos Chemikalieneinwirkung**		EN 423	Good Buena beständig
Castor Chair Abrasion Huellas de sillas de ruedas Stuhlrollenbeanspruchung		EN 425	Pass Conforme geeignet
Under floor heating Calefacción por el suelo Fußbodenheizung		EN 12667	Suitable Apto geeignet
Electrical Behaviours Características eléctricas Elektrisches Verhalten		EN1815	< 2kV Antistatic < 2kV Antiestáticas < 2kV antistatisch
VOC Emissions Emisiones de VOC VOC Emissionen		pREN 15052 Section 01350	Low/Pass Baja/Conforme gering/geeignet

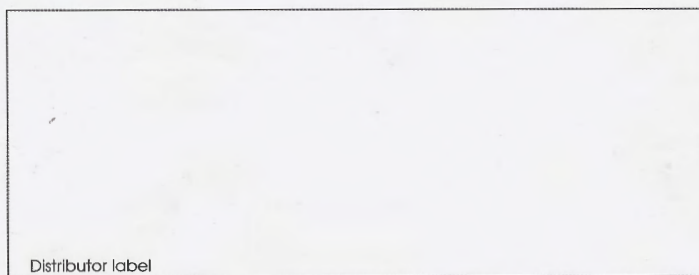

*For wet areas where barefoot slip resistance is required such as showers and swimming pool surrounds, see Altro Marine™ 20/T20. Please also refer to local building regulations/codes of practice.

** Caution Ketone/Aromatic Solvents. Please contact Altro™ for further technical advice regarding staining and chemical resistance.

Contains Biocide.

Installation and Maintenance

Altro XpressLay is loose laid with all joints and perimeters adhered to the sub floor with Altro LooseLay™ double sided tape. Altro XpressLay should be installed in accordance with Altro XpressLay fitting instructions and local codes of practice. Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro flooring in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

For further technical information please visit www.altro.com

Si desea obtener más información técnica, visite www.altroscandess.es

Weitere technische Informationen finden Sie auf unserer Website www.altro.de



EN 13845